

K 6060 3D

for PVCu entrance doors with robust angular fixing cams for extremely high pull-out strength



Product features

- for overlap thicknesses 16–20 mm
- 3-part hinge knuckle
- door part with angular fixing cams for extremely high pull-out strength
- 3D adjustment (side $\pm 5,0$ mm, height $+ 4,0/- 1,0$ mm, compression $\pm 2,0$ mm)
- with integral security pin
- maintenance-free slide bearings

Technical data

Property	Value
Load capacity	160,0 kg
Knuckle length	140,0 mm
Knuckle Diameter	24,0 mm
Pin diameter	10,0 mm

Notes

The load capacity mentioned above refers to the use of 2 hinges per door leaf (1 x 2 m), for detailed information please look at the chapter "technical information".

Quality marks



CE certification




IFT certification

Classification code

4 7 6 0 1 – 1 13

^{*1} depending on the finish

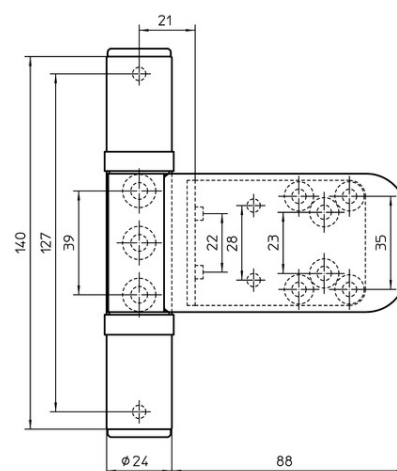

front view

SIKU - K 6060 3D

Installation tools

Telescope jig SIKU Series
K3/K6 Type 1
Drilling jig SIKU Series
K3/K6 simultaneous fixing
Type 1

Function range



burglar
resistance

Item versions

Finish	RAL 9016 Traffic White (SW 070)
VPE	pack of 3
DIN	DIN right and left hand
Article number	5 191000 0 07003
EAN	4015471125967
Finish	H9 Brown (SW 071)
VPE	pack of 3
DIN	DIN right and left hand
Article number	5 191000 0 07103
EAN	4015471125974

